

HIGH CAPACITY SLIDE DRYER




DRYER/OVEN/INCUBATOR



KEY POINTS

- 75°C ± 1° Micro-Processor Temperature Regulation.
- Accepts multiple SHUR/Wave™ small & medium bowls to keep paraffin melted between runs.
- Adjustable shelf accommodates an assortment of slide racks with or without coverslipper adapters.
- Recessed Fluorescent Lighting.
- A series of internal deflectors disperse the heated air evenly throughout the chamber.
- Four powerful 3,200rpm fans each blow 51 cubic feet per minute of heated air across an 18 inch 700 W heating strip for rapid drying of slides.

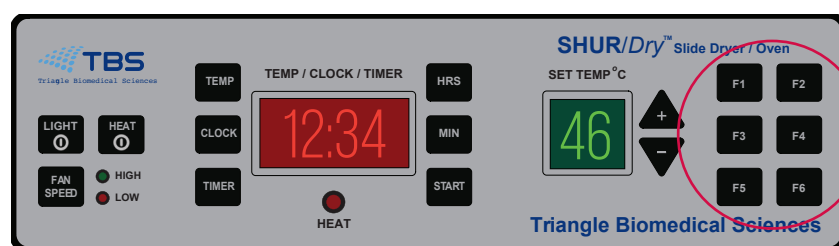

Six built-in timers with distinct beeps for multi-user convenience when drying slides.

ORDERING INFORMATION

DESCRIPTION	UOM	CODE
SHUR/Dry™ Slide Dryer III, High-Capacity Rapid Slide Dryer/Oven/Incubator; forced air; w/ two shelves (one adjustable); six operator-definable programs for controlling drying times; microprocessor controlled; ambient to 75°C ± 1°; 9W recessed fluorescent light; four 3,200 rpm fans, 2 speed fan selectability; 700w, 18" heating strip. Specifications: 115V, 60Hz, 6.7A. External Dimensions WxDxH: (22x18x24.5)in, (56x46x62)cm. Chamber Dimensions WxDxH: (21x11x14)in, (53x27x37)cm. Weight: 70lbs, 32kg	ea	TBS003
Shelf for Slide Dryer III, for additional space utilization	ea	SD-AS
Fluorescent lamp, replacement for SD-III; 9W, 2ea/pk	pk	RFL-9W